

SBTL2000 SERIES

SBTL2000 Single-lane Swing Barrier Turnstile

SBTL2011 Single-lane Swing Barrier Turnstile
(w/ controller and RFID reader)

SBTL2022 Single-lane Swing Barrier Turnstile
(w/ controller and combination fingerprint and RFID reader)



The ZKTeco SBTL2000 single lane swing barrier turnstile is a compact and elegant cost-effective entrance control system.

SBTL2000 is a single lane swing barrier turnstile series designed for smooth and silent operation and draws very little power. It's made of stainless steel which makes SBTL2000 highly durable.

The SBTL2000 acrylic barrier is normally held in a locked position, thus denying passage to the secured side. Upon the SBTL2000 reader (RFID and/ or biometric) positively recognizing a user's valid access card or biometric credential, its barrier swings open automatically, thus allowing users passage to the secured side.

SBTL2000 standard configuration ships with a acrylic barrier. However, the option for a stainless steel bar as a barrier is also available.

SBTL2000 provides both **security** and **convenience** for all customers requiring a wider lane than which traditional turnstiles normally provide.

Built-in Reader Integration




- SBTL2000 series can be pre-ordered from the factory with an integrated RFID card or fingerprint reader (pictured on the left).. or any other biometric reader (i.e. face, finger-vein, palm-vein, etc). This greatly reduces installation time & expense
- SBTL2000 series and associated access control readers are all factory-tested prior to shipping.
- ZKAccess provides true plug'n play turnstiles with the lowest possible total cost of ownership in the industry!

SPECIFICATIONS

Power Supply	AC110V/ 220V, 50/ 60Hz
Operating Temperature	-18°F to 140° F
Power Consumption	16W (Starting), 9W (Standby), 30W (Unlock)
Operating Humidity	5%-80%
Working Environment	Indoor/Outdoor (if sheltered)
Lane Width	41.34 in
Traffic Throughput	42 passages per minute (RFID) / 35 PPM (fingerprint) / 11 PPM (Face)
Casework Material and Barrier Material	SUS304 Stainless Steel
Visual Indicator	Yes
Audio Alarm	Yes
Control System	Input controlled by dry contact
Emergency Button Input	Yes
Barrier Movement	Swing
Gate Dimension	39.4 (H) x 47.2 (L) x 11 (W) in
Dimension	47.24 (L) x 11 (W) x 39.4 (H) inches
Gate Weight	260 lbs

Combine single-lane turnstile model SBTL2000 with SBTL2200 depending on lane requirement (SBTL2000 includes TWO units):

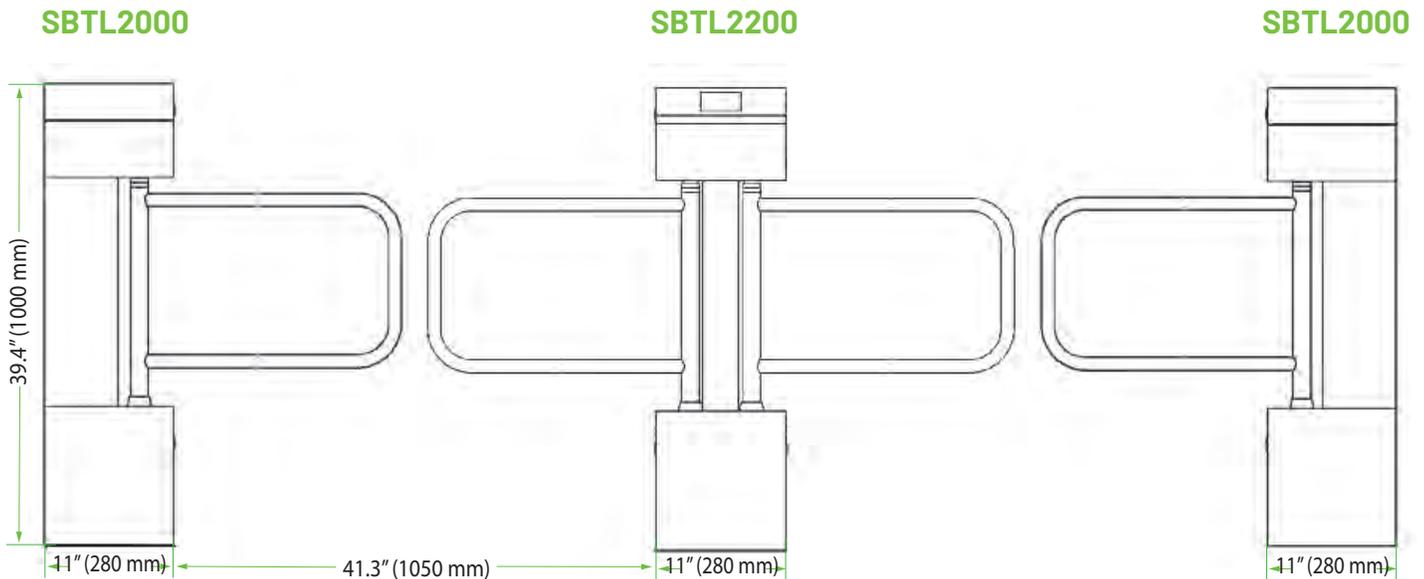

1600 Union Hill Rd., Alpharetta GA 30005

Phone: (862) 505 - 2101 • Fax: (862) 204 - 5906 • sales@zktecousa.com • www.zktecousa.com

© Copyright 2019. ZKTeco Inc. ZKTeco Logo and ZKTeco USA Logo have registered trademarks of ZKTeco or a related company.

All other product and company names mentioned are used for identification purposes only and may be trademarks of their respective owners.

All specifications are subject to change without notice. All rights reserved.