



# PRO CAPTURE-X

## PoE Fingerprint Access Control Reader

ProCapture - X is a next-generation access control reader utilizing advanced SilkID fingerprint technology.



### Biometric Performance:

Reliable, durable and highly accurate SilkID fingerprint sensor with latest fingerprint matching algorithm which provides less than 1.5 second user recognition.



### Display/Audio:

Works without a computer. Complete setup and programming can be done via the ProCapture-X keypad and embedded firmware. Audio-visual indication for acceptance and rejection of valid/invalid fingerprints, cards, and passwords.



### Capacity:

Stores up to 20,000 fingerprint templates and 50,000 cards. Data can be backed up to a USB flash drive and transferred to another ProCapture-X in the absence of network connectivity.



### Full Access Control Built In:

Relay Outputs for electric lock and alarm. Inputs for door status sensor and request to exit hardware. Supports multiple time zones and personnel groups for programming valid entry zones.



### Easy Operation and Management:

Works without a computer. Complete setup and programming can be done via the ProCapture keypad and embedded firmware. Audio-Visual Indication for acceptance and rejection of valid/invalid fingerprints, cards and passwords.



### Options:


ProCapture-X can be configured with optional internal modules which read HID Prox, HID iclass or 13.56 MHz




### For Software Developers:

Free SDK and development tools are available for developers/partners who wish to integrate MB700-ID with any application which requires verifying people. Custom development is also available for OEM partners upon request.

## CONFIGURATION:

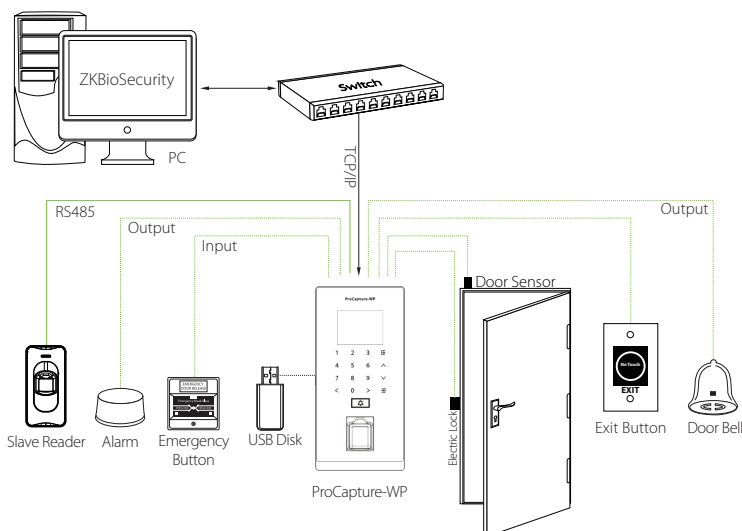

## DIMENSIONS:

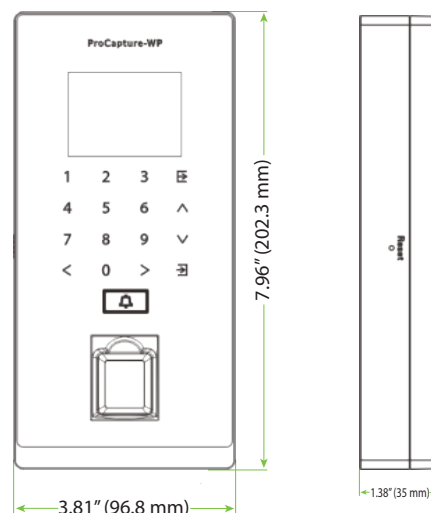

## SPECIFICATIONS:

### Capacity

Fingerprints: 2,000  
Cards: 50,000

### Access Control Interface:

Lock relay output, alarm output/auxiliary input, exit button/door sensor, doorbell output

### Communication:

TCP/IP, RS485 (for slave reader) USB Host Wiegand Input/Output, optional Wi-Fi available

### Hardware:

SilkID Fingerprint Sensor 2.4  
Inch TFT-LCD Touch Screen 125 kHz ZKAccess Card Reader  
Tamper Switch Alarm

### Standard Functions:

Access Levels/Groups/Holidays  
DST/Bell, Schedule, Duress Mode (Password), Anti-Pass-back, Record Query Custom Wallpaper & Screen Saver

### Software Compatibility:

ZKBioSecurity

### Additional Info:

Working Temperature: 14° F to  
Dimensions: 8 in x 3.5 in x 1 in  
Package Includes: 12V 3A Power Supply

### Power:

Power over Ethernet  
Operating Voltage 12V DC  
Current Draw < 500mA


### Part Numbers:

ProCapture - X  
ProCapture - X - HID  
ProCapture - X - iClass


## WHAT'S IN THE BOX:




ProCapture-T




Installation Template



Back Plate




Measuring Tape



Network Cable



Screws




AC Power Adapter



Screwdriver



Cables



Diode

## ZKTeco USA

1600 Union Hill Rd., Alpharetta GA 30005

Phone: (862) 505 - 2101 • Fax: (862) 204 - 5906 • sales@zktecousa.com • www.zktecousa.com

© Copyright 2019. ZKTeco Inc. ZKTeco Logo and ZKTeco USA Logo have registered trademarks of ZKTeco or a related company.

All other product and company names mentioned are used for identification purposes only and may be trademarks of their respective owners.

All specifications are subject to change without notice. All rights reserved.